


Canrig 6027 AC 275 Ton Top Drive System – \$ 650,000 AS IS WORKING

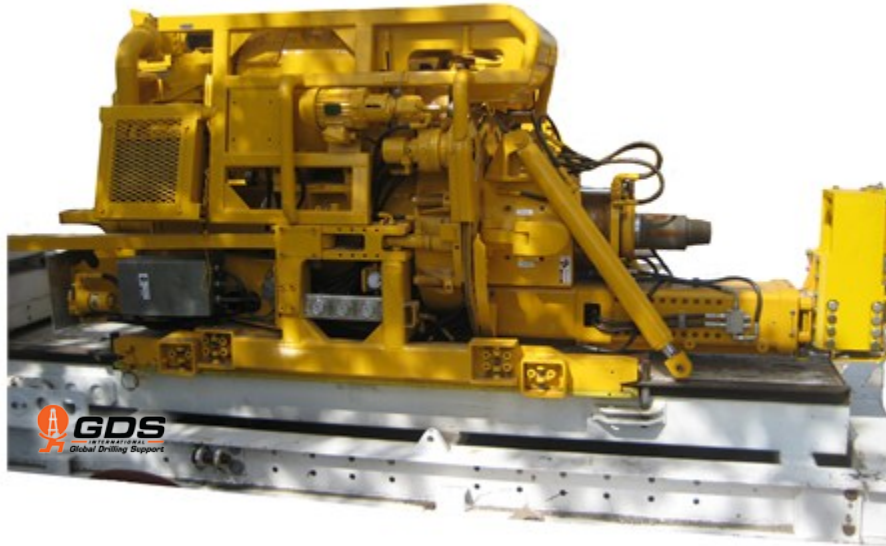

Technical Specification:

Load Path: 275 Ton	Torque Rating:
Mud Path: 5000 PSI	Continuous Torque: 24,000 Ft.-Lbs
Motor: GE 761 Series	Intermittent Torque: 30,000 Ft.-Lbs
	Break Out Torque: 37,500 Ft.-Lbs.

Top Drive Power Package Includes:

Mounted in customer SCR house to interface with a customer supplied SCR includes motor starts and PLC controls
 Top Drive Control Console with all control buttons and meters to operate the top drive unit. Stainless steel enclosure box.

Top Drive HPU:

Redundant pump and motor system, mounted on the drill floor or in suitable position outside of classification area

Top Drive Rig Specific Interface Includes:

Guide track suitable for a standard triple mast, torque reaction kit for attaching the guide beam to the mast, Crown hanger kit

Service Loop Kit Includes:

Service loop to reach from the Top Drive to the upper mast junction box, Upper mast junction box, work platform to be supplied by the customer **Customer is responsible for all cables from the SCR and Control room to the mast junction box

Notes:

- GDS is a QMS registered and fully licensed API 8C facility (license no. 8C-0161) and can repair, recertify and test any top drive to specification. Quote available upon request.